

RB1016 '46-'75 CJ-5 Front & Rear Lubeable Shackles





REQUIRED TOOLS

| Ratchet | | | |
|---------|------|--------|--|
| (2) | 3/4" | Socket | |


| KIT CONTAINS | QTY |
|--|-----|
| Steel Plate | 4 |
| 7/16" Zinc Plated Steel Bolt w/ Grease Fitting | 4 |
| .45" Steel Bushing | 4 |
| .5" Steel Bushing | 2 |
| ½" Hex Nut | 4 |
| ½" Zinc Plated Steel Bolt | 2 |
| Poly Bushing | 8 |
| 7/16" Nylock Nut | 2 |





RB1016 '46-'75 CJ-5 Front & Rear Lubeable Shackles

- 1) The Greasable Bolts will need to be tightened to 30ft-lbs
- 2) The Steel center bolt will need to be tightened to 55ft-lbs
- 3) Each bolt will need to be re-tightened after 100 miles of use

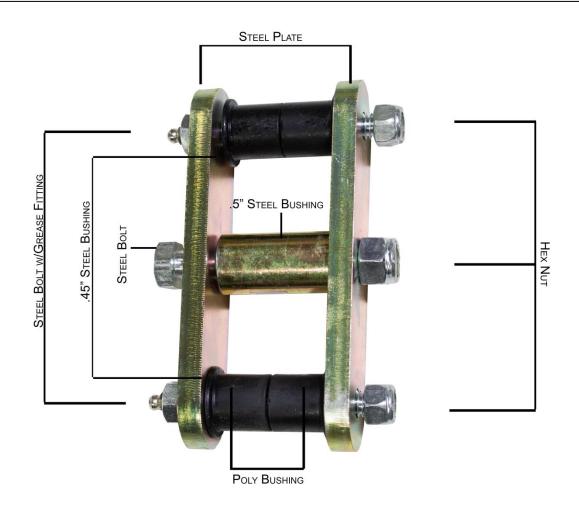



RB1016 '46-'75 CJ-5 Front & Rear Lubeable Shackles

